

ВЛАГОМЕРЫ**ММ 70****ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ**

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астана +7(7172)727-132	Калуга (4842)92-23-67	Омск (3812) 21-46-40	Ставрополь (8652)20-65-13
Астрахань (8512) 99-46-04	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462) 77-98-35
Барнаул (3852) 73-04-60	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Белгород (4722)40-23-64	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Владивосток (423)249-28-31	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Волгоград (844)278-03-48	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Вологда (8172)26-41-59	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Воронеж (473)204-51-73	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212) 92-98-04
Екатеринбург (343)384-55-89	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Иваново (4932)77-34-06	Набережные Челны (8552)20-53-41	Севастополь (8692) 22-31-93	Череповец (8202)49-02-64
Ижевск (3412)26-03-58	Нижний Новгород (831)429-08-12	Симферополь (3652) 67-13-56	Ярославль (4852)69-52-93
Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54	

MM70 Handheld Moisture and Temperature Meter for Spot-Checking in Oil



The MM70 is an ideal tool for the preventive maintenance of oil-filled systems. The water activity measurement indicates the margin to free water formation, which causes severe problems in lubrication systems.

Features/Benefits

- Measurement independent of oil type, age and temperature
- In-line process checking through ball valve, no need to drain the oil
- Rugged and reliable construction
- Excellent pressure and temperature tolerance
- Data can be logged and transferred to a PC
- Proven Vaisala HUMICAP® Sensor, over 15 years in oil applications.
- Compatible with Vaisala's fixed oil moisture instruments
- No reference oil needed for recalibration
- NIST traceable calibration (certificate included)

The Vaisala HUMICAP® Handheld Moisture Meter for Oil MM70 enables reliable detection of moisture in oil.

The probe can be inserted directly into the process pipe through a ball valve without draining the oil in the system.

The MM70 measures moisture in oil in terms of the water activity (aw) and temperature (T). Water activity directly indicates whether there is a risk of free water formation. The measurement is independent of oil type, age and temperature.

PPM Calculation Included

The MM70 has an embedded model for expressing moisture as ppm in mineral transformer oil. The customer can enter up to three other oil models into the meter's memory.

Numerical and Graphical Display

The MM70 features a multilingual, menu-based user interface and a backlit LCD display. The measurement parameters can be numerically and graphically displayed and logged into the meter's memory at the same time. An analog output option is also available.

Vaisala HUMICAP® Technology

The MM70 incorporates the latest generation of the Vaisala HUMICAP® Sensor, developed for demanding moisture measurements in liquid hydrocarbons. The sensor's excellent chemical tolerance provides accurate and reliable measurement over the measurement range.

Speedy Service - Once a Year

The meter can be recalibrated by sending the probe to Vaisala Service, or customers can calibrate the instrument themselves using a standard relative humidity calibration.

Multi-Probe Operation

One or two probes can be connected simultaneously. Maintenance teams can use additional Vaisala dew point or relative humidity probes for other tasks. For example, a dew point probe is ideal for checking the moisture inside washed and dried oil tanks.

Connection to PC

The optional MI70 Link Windows® software in combination with a USB connection cable is used to transfer logged data and real time measurement data from the MM70 to a PC.

Technical Data

Performance

WATER ACTIVITY

Measurement range a_w 0 ... 1

Accuracy (including nonlinearity, hysteresis and repeatability)

When calibrated against salt solutions (ASTM E104-85):

0 ... 0.9	± 0.02
0.9 ... 1.0	± 0.03

Maximum achievable accuracy when calibrated against high-quality, certified humidity standards:

0 ... 0.9	± 0.01
0.9 ... 1.0	± 0.02

Response time (90%) at +20 °C (+68 °F)

in still oil (with stainless steel filter) 10 min.

Sensor Vaisala HUMICAP® 180L2

Recommended recalibration interval 1 year

TEMPERATURE

Measurement range -40 ... +100 °C (-40 ... +212 °F)

Typical accuracy at +20 °C ± 0.2 °C (± 0.36 °F)

Typical temperature dependence of electronics ± 0.005 °C/°C (± 0.005 °F/°F)

Sensor Pt100 RTD Class F0.1 IEC 60751

Typical long-term stability better than 0.01 aw / year

Operating Environment

PROBE

Operating temperature range for electronics -40 ... +60 °C
(-40 ... +140 °F)

Operating pressure range max. 20 bar
during installation through ball valve max. 10 bar

Oil flow range max. 1 m/s

INDICATOR

Operating temperature range -10 ... +40 °C (+14 ... +104 °F)

Operating humidity range non-condensing

ELECTROMAGNETIC COMPATIBILITY

Complies with EMC standard EN61326-1, Electrical equipment for measurement, control and laboratory use - EMC requirements;
Portable equipment.

Display

LCD with backlight, graphic trend display of any parameter, character height up to 16 mm

Analog output 0 ... 1 VDC

Output resolution 0.6 mV

PC interface MI70 Link software with USB or serial port cable

Data logging capacity 2700 points

Alarm Audible alarm function

Mechanics

PROBE

Housing classification IP65 (NEMA 4)

Housing material ABS/PC blend

Probe material Stainless steel (AISI316L)

Cable length between probe and indicator 1.9 m,
10 m extension available

Weight 506 g

INDICATOR

Housing classification IP54

Weight 400 g

Probe inputs 1 or 2

Options and Accessories

Weatherproof Carrying Case MI70CASE4

Ball valve set (incl. fitting body & blanking plug) HMP228BVS

Probe cable extension, 10 m 213107SP

Transmitter connection cables for

MMT162 219980

MMT310 DRW216050

MMT330 211339

MI70 Link software with USB cable 219687

MI70 Link software with serial port cable MI70LINK

Analog output cable 27168ZZ


Sensor protection HM47453SP

Dew point measurement probes DMP74A/B

Relative humidity measurement probes HMP75, HMP76, HMP77

Dimensions

Dimensions in mm (inches)

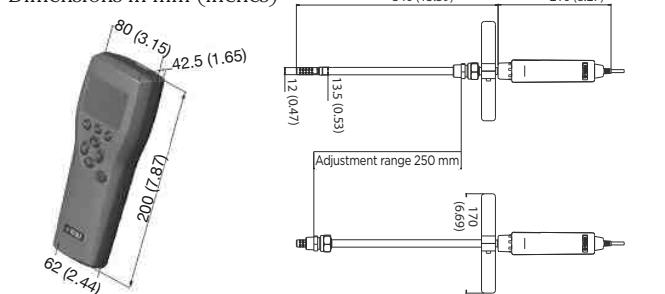

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астана +7(7172)727-132	Калуга (4842)92-23-67	Омск (3812) 21-46-40	Ставрополь (8652)20-65-13
Астрахань (8512) 99-46-04	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462) 77-98-35
Барнаул (3852) 73-04-60	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Белгород (4722)40-23-64	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Владивосток (423)249-28-31	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Волгоград (844)278-03-48	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Вологда (8172)26-41-59	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Воронеж (473)204-51-73	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212) 92-98-04
Екатеринбург (343)384-55-89	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Иваново (4932)77-34-06	Набережные Челны (8552)20-53-41	Севастополь (8692) 22-31-93	Череповец (8202)49-02-64
Ижевск (3412)26-03-58	Нижний Новгород (831)429-08-12	Симферополь (3652) 67-13-56	Ярославль (4852)69-52-93
Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54	

сайт: vsa.nt-rt.ru || эл. почта: vgs@nt-rt.ru